


LHS SERIES

**Horizontal Openwell
Submersible Pumpsets
50 Hz**



PUMPS

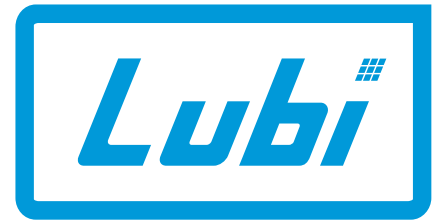

QUALITY • INNOVATION • SUSTAINABILITY



Description

Lubi Horizontal Openwell Submersible Pumpsets are manufactured strict quality assurance for years of efficient and reliable operation. Following are some of the special features.

Salient Features

- Pumpset are designed to withstand voltage drops to 320 volts.
- It has well designed sleeve and thrust bearing of adequate capacity for longer life.
- High operating efficiencies of pumpset result into high water discharge rate and lower power bills.
- All components are precisely machined on modern precision machine tools to give you years of reliable operation.
- Stator and rotor of the monoset are vacuum impregnated with synthetic varnish and epoxy coated for corrosion resistance.
- All rotating components are dynamically balanced to ensure long bearing life and vibration free smooth operation.
- All pumpsets are fully tested prior to despatch.

Material of Construction

Motor Body	: Cast Iron / Stainless Steel
Stator	: Vacuum Impregnated and epoxy coated for corrosion resistance. Thick end laminations are provided to protect motor windings.
Rotor	: Vacuum impregnated, shot blasted & coated with poly urethane colour for corrosion resistance & dynamically balanced for vibration free smooth operation.
Winding	: PVC / Polyester insulated, water cooled.
Journal Bearings	: Leaded Bronze and Stainless Steel, Water Lubricated, having high load bearing capacity.
Thrust Bearings	: Carbon Vs Stainless Steel and water lubricated to withstand high axial thrust loads.
Pressure Equalizing Diaphragm	: Adequately sized to accommodate expansion of water inside th motor and prevent loss cooling water
Impeller	: Graded Cast Iron & Dynamically balanced.
Casing	: High grade Cast Iron.
Wear Rings	: High quality abrasion resistance Bronze.
Shaft	: Stainless Steel of adequate diameter to ensure rigidity and ground to close tolerances.
Cable Sealing Arrangement	: Designed so that no borewell water with sand can enter the motor.

Applications

- Irrigation from open wells especially where there is wide fluctuation in water levels.
- Community water supply from open wells.
- Fountains.
- Canals / Rivers belt irrigation.
- Water supply for high-rise building.

50 Hz, 415 V (-15% & +6%) Three Phase, 2880 RPM

Model	H.P.	Size in mm	Head in Metres											
			6	8	10	12	14	16	18	20	22	24	26	28
			Discharge in L.P.M.											
LHS-51	1.00	25 x 25					215	195	180	150	100			
LHS-52	1.00	40 x 40			290	270	250	180	120					
LHS-53	1.00	50 x 40		310	290	270	200							
LHS-54	1.00	50 x 50	550	530	370	220								
LHS-55	1.50	40 x 40								240	190	170	110	
LHS-56	1.50	50 x 40					260	240	200	160	80			
LHS-57	1.50	50 x 50			390	340	270							
LHS-58	2.00	40 x 40									250	230	200	180
LHS-59	2.00	50 x 40								350	320	280	230	
LHS-60	2.00	50 x 50						370	330	220				
LHS-61	2.00	65 x 50			580	420	360	240						
LHS-64	2.00	80 x 80	870	740	610									

Cast Iron Body, 50Hz, 415V (-15% & +6%) Three Phase, 2880 RPM

Pump Type	H.P.	Size in mm	Head in Metres															
			6	8	12	16	20	24	26	28	32	36	40	42	44	48	52	56
			Discharge in L.P.M.															
LHS-1A	3.00	50 x 38				370	350	310	280	260	210	120						
LHS-2	3.00	65 x 65		750	700	510	360											
LHS-2AH	3.00	65 x 50			740	750	580	480	425	360								
LHS-3A	3.00	80 x 65	860	840	780	570												
LHS-4A	5.00	50 x 38							480	430	340	250	200	140				
LHS-5A	5.00	65 x 50				610	610	600	590	560	375	170						
LHS-5B	5.00	65 x 50						500	485	475	400	325	280	240	150			
LHS-5AH	5.00	65 x 50				730	670	620	580	475	315							
LHS-5	5.00	65 x 65			1040	900	750	540										
LHS-5H	5.00	65 x 65				750	670	540	450	240								
LHS-6	5.00	80 x 80		890	870	850	760											
LHS-6A	5.00	80 x 65		1327	1242	1080	870	560										
LHS-16	5.00	100 x 100	1310	1240	1100	750												
LHS-9A	7.50	65 x 50				880	875	860	850	825	750	620	540	450				
LHS-9B	7.50	65 x 50							600	555	520	485	470	400	315	220		
LHS-9AH	7.50	65 x 50						890	830	720	600	520	460					
LHS-9	7.50	65 x 65						730	720	700	540							
LHS-10 *	7.50	80 x 80				1310	1190	1050	970	860	630							
LHS-17	7.50	100 x 100		2690	2320	1900	1400	502										
LHS-19	7.50	125 x 125	3500	2900														
LHS-14 *	10.0	80 x 80				1120	1100	1080	1050	1000	720							
LHS-15 *	10.0	100 x 100				1420	1300	1200	1100									
LHS-18	10.0	100 x 100		2250	2100	1850	1200											
LHS-20	10.0	125 x 125	3500	3300	2800	1250												

Note :

- LHS : C. I. Construction with copper rotor.
- All pumps with * are ISI marked.
- Please select pumps in the range of discharge shown in bold figure.

Cast Iron Body, 50Hz, 415V (-15% & +6%) Three Phase, 2880 RPM

Pump Type	H.P.	Size in mm	Head in Metres																
			10	14	18	22	26	30	34	38	42	46	50	54	58	62	66	68	72
			Discharge in L.P.M.																
LHS-21A	12.50	65 x 65				970	960	940	920	860	750	600	420	330					
LHS-21L	12.50	65 x 50					1410	1390	1370	1310	1160	950	670						
LHS-21H	12.50	65 x 50									810	790	740	700	650	590	500	440	300
LHS-23	12.50	80 x 80			1660	1600	1550	1450	1180	800									
LHS-24	12.50	100 x 80		1810	1750	1680	1570	1430	1250										
LHS-25	12.50	100 x 100		1860	1790	1700	1600	1370	1200	800									
LHS-27L	15.00	65 x 50							1480	1420	1370	1260	1170	1000	780				
LHS-27H	15.00	65 x 50										920	915	910	900	890	870	840	520
LHS-28	15.00	65 x 65								980	850	710	460	380					
LHS-29	15.00	80 x 80				2000	1875	1720	1500	1350	1120	750							
LHS-30	15.00	100 x 80					1550	1450	1200	760									
LHS-31	15.00	100 x 100			2200	2000	1800	1500	1280	960									
LHS-32	15.00	125 x 125	3550	3050	2000														
LHS-33A	20.00	65 x 50											800	760	680	650	560	520	440
LHS-33	20.00	65 x 65										1300	1200	1100	1000	880	750	670	
LHS-34	20.00	80 x 80								1730	1600	1460	1300	1100					
LHS-34A	20.00	80 x 65										1840	1700	1600	1480	1280	1080	620	
LHS-35	20.00	100 x 100				2480	2400	2300	1860	1650	1000								
LHS-36	20.00	125 x 125		3550	3200	2700	2100	900											
LHS-37	25.00	80 x 80									1680	1550	1400	1220	1100	950			
LHS-38	25.00	100 x 100						2050	1900	1750	1400	1080	500						
LHS-39	25.00	125 x 125			3870	3530	3080	2650											
LHS-40	30.00	80 x 80													1700	1620	1450	1350	1150
LHS-41	30.00	100 x 100							2750	2400	2200	2050	1660	1500					
LHS-42	30.00	125 x 125					3200	3050	2400										
LHS-43	30.00	150 x 150		5180	4550	4030	3140	2500	2380										

Note :

■ Please select pumps in the range of discharge shown in bold figure.

LUBI INDUSTRIES LLP

Near Kalyan Mills, Naroda Road, Ahmedabad-380 025, INDIA.

Phone : +91 - 79 - 30610100, Fax No. :+91 - 79 - 30610300.

Sales Enquiries: mkt-sales@lubipumps.com

www.lubipumps.com

Product Improvement is a continuous process at 'LUBI'. The data given in this publication is therefore subject to revision.



ISO 9001



ISO 14001

Customer Care Number : 9824200800